# Pool alfresco gable infill: drawing pack

Concept Draft 2 · glazed wall on the existing pool fence line · 05.11.2026



In-situ overlay on a site photo, from inside the alfresco looking out (mirrored relative to the elevation). Indicative only, not a render. The existing glass fence is still visible; it is replaced by the new wall.

## KEY INFORMATION

| | |
|---|---|
| **Overall opening** | 11,844 between brick returns |
| **Plate height** | 3,110 FFL to top of steel beam (rake starts) |
| **Steel beam** | 200 deep assumed: lower glazing head 2,910 |
| **Ceiling rake** | 9.7°: apex ≈ 4,122 AFL |
| **Doors** | Double pivot, 2,000 opening, 2 leaves ≈ 975 × 2,860, full height |
| **Windows** | 4 off, 2,311 each: 1,200 solid glass, then glass louvres + fixed security screens to beam |
| **Steel posts** | 6 off, 100 SHS (TBC): brick ends, between windows, door jambs |
| **Gable posts** | 3 off: centre + over the posts between windows |
| **Pool-side lobby** | 2,200 × 1,500, 1200 glass, 900 self-closing gate opening into lobby |
| **Beam spans** | 2,411 / 2,411 / 2,100 / 2,411 / 2,411 |

## SHEETS


| | |
|---|---|
| **DA-00** | Cover, key information & in-situ view (NTS) |
| **DA-01** | Elevation from pool side (1:50 @ A3) |
| **DA-02** | Plan at gable wall (1:50 @ A3) |
| **DA-03** | Pool-side lobby: plan detail (1:20 @ A3) |
| **DA-04** | Opening schedule, steel setout & notes (NTS) |
| **DA-05** | Window & door schedule (NTS) |


## FOR

- **Structural engineer:** beam, posts, footings and gable post loads (DA-01, DA-02, DA-04).
- **Pool certifier:** barrier wall, lobby, gate and louvre screens (DA-02, DA-03, DA-04).
- **Window/door supplier:** quote from the window & door schedule (DA-05), with DA-01.

PROJECT
**Pool alfresco gable infill**
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

**PRELIMINARY**
**NOT FOR CONSTRUCTION**

REVISIONS


| | | |
|---|---|---|
| A | 05.11.2026 | Concept: Draft 2 for comment |
| B | 05.11.2026 | Window & door schedule added (DA-05) |
| C | 05.11.2026 | Corrections: spans, lobby, leaf weight |

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING
**Cover, key information & in-situ view**

| SCALE | DATE | REV |
|---|---|---|
| NTS | 05.11.2026 | C |

**DA-00**

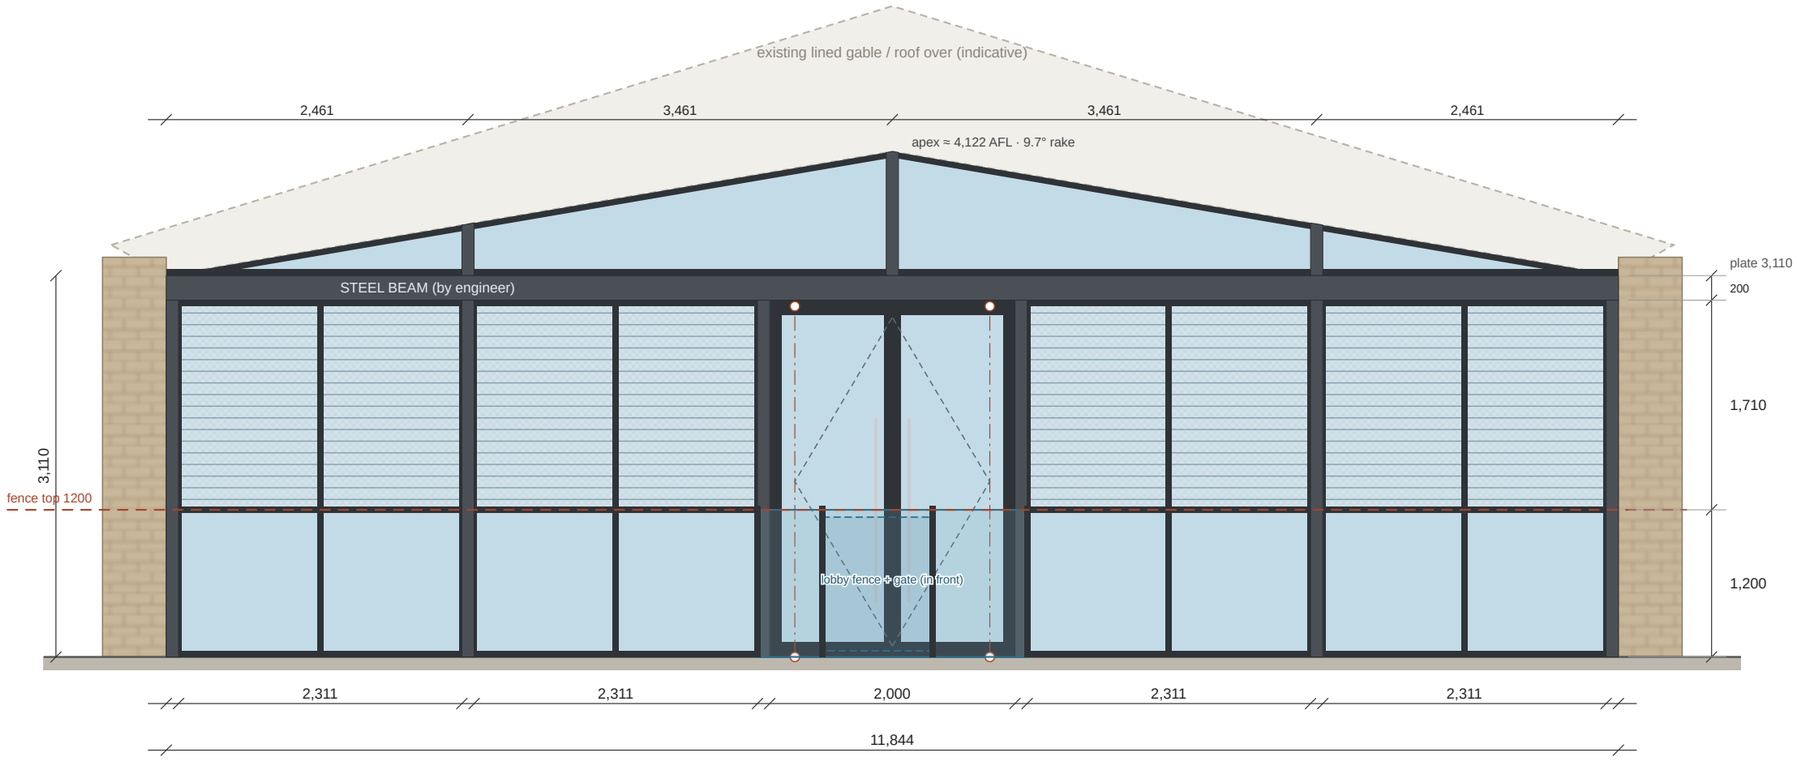


**ELEVATION FROM POOL SIDE** · scale 1:50 @ A3

Solid glass to the 1,200 fence line; glass louvres with fixed security screens above to the beam; full-height double pivot doors; steel posts at the brick ends, between the windows and at the door jambs. The lobby fence and gate are shown dashed in front of the doors. The roof outline over is indicative only.

0 1 2 3 4 5 m

PROJECT

**Pool alfresco gable infill**

Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

**PRELIMINARY**
**NOT FOR CONSTRUCTION**

REVISIONS

| | | |
|---|---|---|
| A | 05.11.2026 | Concept: Draft 2 for comment |
| B | 05.11.2026 | Window & door schedule added (DA-05) |
| C | 05.11.2026 | Corrections: spans, lobby, leaf weight |

GENERAL


All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING

**Elevation from pool side**

| SCALE | DATE | REV |
|---|---|---|
| 1:50 @ A3 | 05.11.2026 | C |

**DA-01**

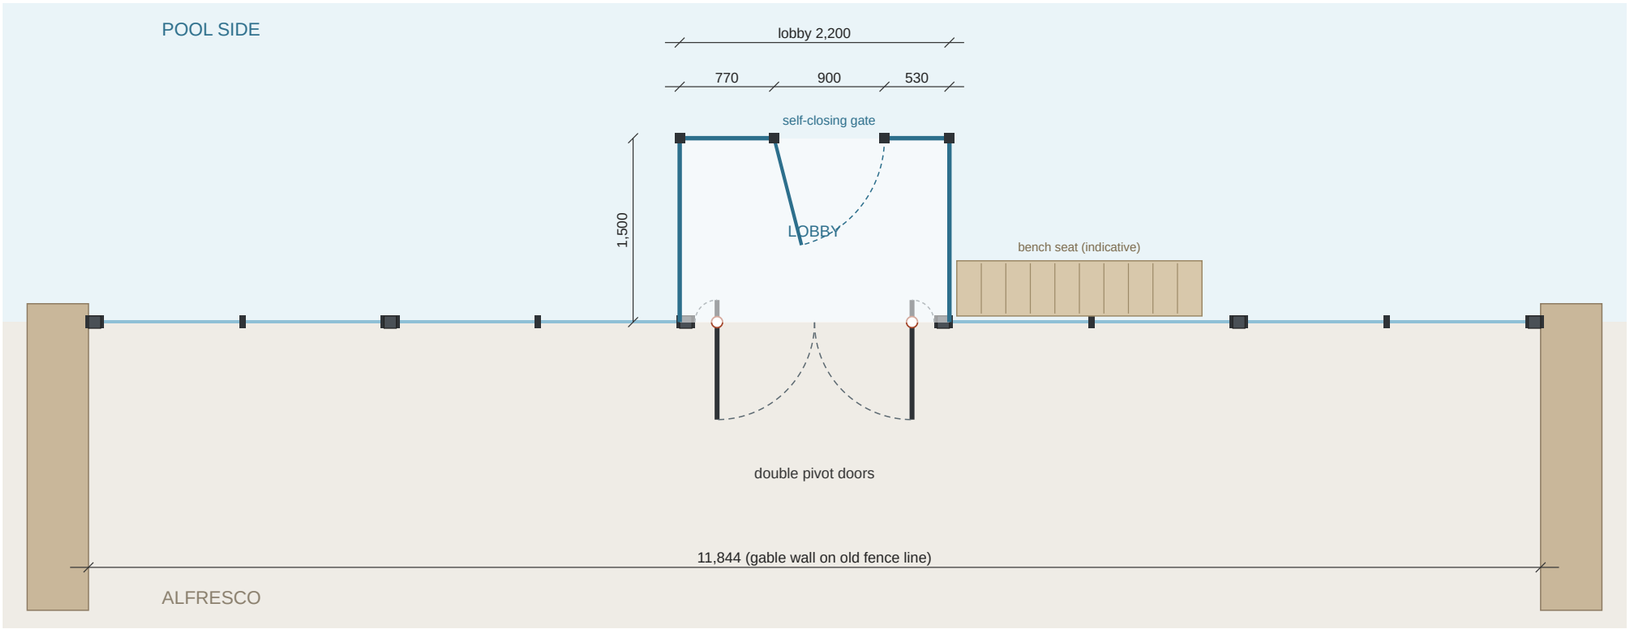


**PLAN AT GABLE WALL** · scale 1:50 @ A3

0 1 2 3 4 5 m

The wall is built on the existing pool fence line. The pivot doors swing into the alfresco. The pool-side lobby fence returns onto the door-jamb posts, and the gate opens into the lobby, away from the pool. Steel posts are shown solid. The bench seat is indicative.

PROJECT

**Pool alfresco gable infill**

Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

**PRELIMINARY**
**NOT FOR CONSTRUCTION**

REVISIONS

| | | |
|---|---|---|
| A | 05.11.2026 | Concept: Draft 2 for comment |
| B | 05.11.2026 | Window & door schedule added (DA-05) |
| C | 05.11.2026 | Corrections: spans, lobby, leaf weight |

GENERAL


All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING

**Plan at gable wall**

| SCALE | DATE | REV |
|---|---|---|
| 1:50 @ A3 | 05.11.2026 | C |

**DA-02**

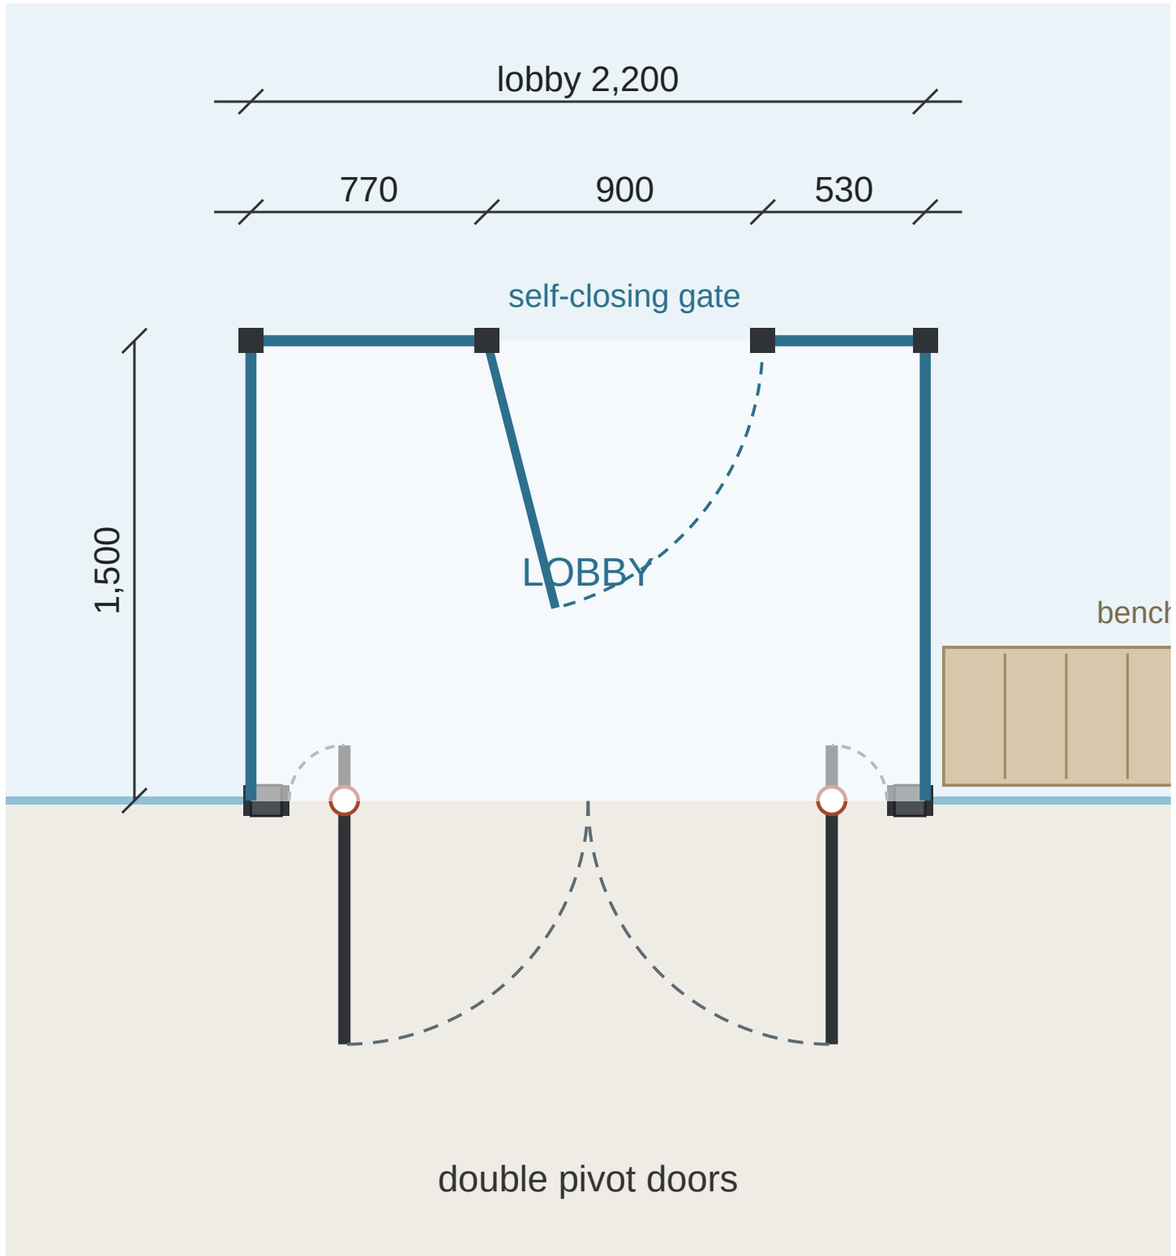


## LOBBY & GATE REQUIREMENTS

- The lobby fence is a **1,200 minimum** glass pool barrier, matching the existing fence. The existing panels and spigots may be reused if they're compliant.
- The gate is **900 wide**, self-closing and self-latching from any position, with the **latch at 1,500 or higher** above ground (or shielded as per AS 1926.1).
- The gate **opens into the lobby, away from the pool**. Lobby depth (1,500) is set so the gate swings clear.
- The lobby fence returns onto the door-jamb steel posts. Gaps at the posts and under the panels must be 100 or less.
- Inside the lobby, keep the non-climbable zone clear: nothing climbable within 900 of the fence.
- The pivot doors open into the alfresco and sit inside the lobby, not in the pool area.

Lobby size 2,200 × 1,500 is an assumption from the hand sketch. Confirm it, and get the arrangement signed off by the pool certifier before ordering.

Rev C: the 2,200 is overall, to the outer faces of P3 and P4 (4,822 to 7,022), so the side panels clamp to the post faces rather than the 2,100 post centres. The 770 / 900 / 530 front sizes are nominal; the fence supplier deducts the hinge, latch and post gaps.

Levels: the topped alfresco slab stops at the wall line. The lobby is at pool level, about 100 below the alfresco FFL, so there is a step down of about 100 out of the doors (no flush threshold). Measure the 1,200 fence and gate heights and the latch height (1,500 or more) from the lobby level. Certifier to confirm.

**LOBBY PLAN DETAIL** · scale 1:20 @ A3

0 1 2 m

PROJECT
**Pool alfresco gable infill**
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

**PRELIMINARY**
**NOT FOR CONSTRUCTION**

REVISIONS

| | | |
|---|---|---|
| A | 05.11.2026 | Concept: Draft 2 for comment |
| B | 05.11.2026 | Window & door schedule added (DA-05) |
| C | 05.11.2026 | Corrections: spans, lobby, leaf weight |

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING
**Pool-side lobby: plan detail**

SCALE 1:20 @ A3 | DATE 05.11.2026 | REV C

**DA-03**

## OPENING SCHEDULE

| REF | TYPE | ZONE | WIDTH | HEIGHT | QTY | AREA M² (TOTAL) |
|---|---|---|---|---|---|---|
| A1 | Pivot door leaf | Centre pivot doors | 975 | 2,860 | 2 | 5.58 |
| A2 | Glass louvre + security screen | Main | 1,156 | 1,710 | 8 | 15.81 |
| A3 | Fixed glass | Base (fence line) | 1,156 | 1,200 | 8 | 11.09 |
| A4 | Raked fixed glass | Gable | 3,361 | 429→1,004 | 2 | 4.82 |
| A5 | Raked fixed glass | Gable | 2,411 | 0→412 | 2 | 0.99 |
| A6 | Pool fence glass | Lobby front | 770 | 1,200 | 1 | 0.92 |
| A7 | Pool fence glass | Lobby front | 530 | 1,200 | 1 | 0.64 |
| A8 | Pool fence glass | Lobby sides | 1,500 | 1,200 | 2 | 3.60 |
| A9 | Glass pool gate | Lobby front (self-closing) | 900 | 1,200 | 1 | 1.08 |
| | **Total glazed area (approx.)** | | | | | **44.5** |

Window sizes are clear between steel post faces; pane and gallery sizes are to mullion centrelines. Make-up sizes by supplier after site measure.

## STEEL SETOUT (FROM LEFT BRICK, VIEWED FROM POOL)

| REF | MEMBER | CENTRE | SIZE | HEIGHT | GABLE POST OVER |
|---|---|---|---|---|---|
| P1 | End post against brick | 50 | 100 SHS (TBC) | 0 → 2,910 | |
| P2 | Post between windows | 2,461 | 100 SHS (TBC) | 0 → 2,910 | Yes |
| P3 | Door jamb post | 4,872 | 100 SHS (TBC) | 0 → 2,910 | |
| P4 | Door jamb post | 6,972 | 100 SHS (TBC) | 0 → 2,910 | |
| P5 | Post between windows | 9,383 | 100 SHS (TBC) | 0 → 2,910 | Yes |
| P6 | End post against brick | 11,794 | 100 SHS (TBC) | 0 → 2,910 | |
| B1 | Beam, full width | 0 → 11,844 | 200 deep (TBC) | 2,910 → 3,110 | |

| REF | GABLE MEMBER | CENTRE | FROM CENTRE | BEARS ON |
|---|---|---|---|---|
| G1 | Gable post | 2,461 | -3,461 | Over post P2 |
| G2 | Centre (king) post | 5,922 | 0 | Over door bay (beam) |
| G3 | Gable post | 9,383 | 3,461 | Over post P5 |

## STRUCTURE (ENGINEER TO CONFIRM)

- The beam sits within the 3,110 plate height. The lower glazing head is 2,910 with a 200 beam.
- Posts at the brick ends, between the windows and at the door jambs give beam spans of 2,411 / 2,411 / 2,100 / 2,411 / 2,411.
- The gable posts sit directly over posts P2 and P5 and over the beam at the centre of the door bay. Advise whether they carry roof load or are only glazing mullions.
- Post base plates and footings to suit the slab at the old fence line (footing locations TBC).
- Pivot door floor boxes need recesses in the slab. Coordinate them with the post footings.
- Paint the steel to match the charcoal window frames.

## GLAZING & LOUVRES

- The lower 1,200 is fixed glass in every window, and the louvres run from 1,200 to the beam (no transom).
- Glass louvre blades max about 1,200 long, so each window has one mullion and two louvre galleries.
- Fixed security screens (stainless mesh) to all louvres, on the pool side so the operators can be reached from inside. They must be removable only with tools.
- Gable: raked fixed glass between the gable posts. Consider cladding the last 400–600 at each end.
- Pivot leaves ≈ 975 × 2,860, about 85 kg each (estimate), 10.38 laminated glass. Supplier to confirm the hardware.

## POOL BARRIER

- The new wall replaces the glass fence and becomes part of the pool barrier (NSW Swimming Pools Act and Regulation; AS 1926.1).
- The doors open into the pool-side lobby, not the pool area. The lobby fence and gate complete the barrier (DA-03).
- The louvres open fully behind fixed security screens. Give the certifier the screen spec.
- The 1,200 solid glass base is non-climbable and matches the fence line.

## TO CONFIRM

- Site measures: width at the floor and at the plate, whether the brick returns are plumb, the slab fall and levels at the fence line.
- Site-verify the 3,110 plate height (confirmed by the builder).
- Beam, post and footing sizes (engineer).
- Lobby size and gate position; the certifier's acceptance.
- Louvre system and screen product; pivot hardware; frame colour.

PROJECT
**Pool alfresco gable infill**
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

**PRELIMINARY**
**NOT FOR CONSTRUCTION**

REVISIONS

| | | |
|---|---|---|
| A | 05.11.2026 | Concept: Draft 2 for comment |
| B | 05.11.2026 | Window & door schedule added (DA-05) |
| C | 05.11.2026 | Corrections: spans, lobby, leaf weight |

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.


DRAWING
**Opening schedule, steel setout & notes**

| SCALE | DATE | REV |
|---|---|---|
| NTS | 05.11.2026 | C |

**DA-04**


# WINDOW & DOOR SCHEDULE: VIEWED FROM POOL SIDE

## W01–W04 ×4

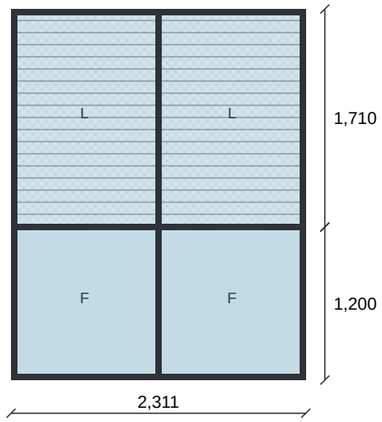



F = fixed glass · L = glass louvres + fixed security screen

## D01 ×1

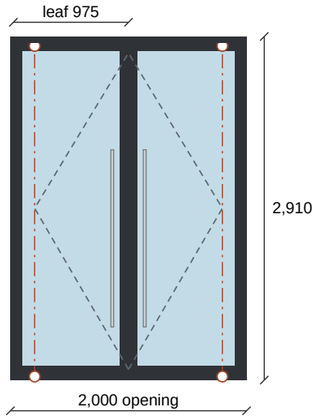



Double pivot doors · ○ pivot points · swing into alfresco

## GW01–GW02 ×2 each, handed

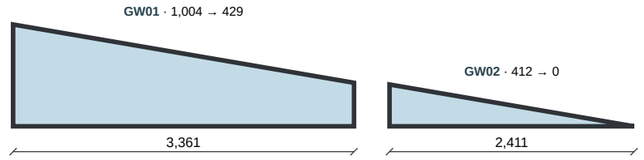


Right-hand set shown (centre → brick); left-hand set mirrored. Heights above top of beam.

## G01 + F01 lobby front

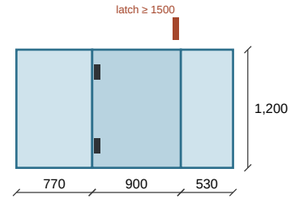


Front fence viewed from the pool: F01 panels, G01 gate

| MARK | QTY | LOCATION | TYPE | SIZE W × H | CONFIGURATION | GLAZING | SCREEN | HARDWARE | NOTES |
|---|---|---|---|---|---|---|---|---|---|
| **W01–W04** | 4 | W01 P1–P2 · W02 P2–P3 · W03 P4–P5 · W04 P5–P6 (viewed from pool) | Combination window: fixed glass base + glass louvres | 2,311 × 2,910 clear between steel post faces | 2 bays of 1,156 with a centre mullion. Lower: fixed glass 1,156 × 1,200 (×2). Upper: louvre galleries 1,156 × 1,710 (×2), 1,200 to beam, no transom. | Fixed: Grade A safety glass to AS 1288 (e.g. 10.38 laminated); thickness by supplier for size & wind load. Louvres: glass blades, safety glass (type TBC) | **Fixed security screen** to louvres (stainless mesh, e.g. Crimsafe or equal), pool side, removable only with tools | Louvre handle operators (internal); optional lockable gear | Lower 1,200 fixed glass is the pool barrier. Seal to steel posts each side. |
| **D01** | 1 | P3–P4, centre of wall | Double pivot door pair, full height | 2,000 × 2,910 opening; leaves ≈ 975 × 2,860 | 2 glazed pivot leaves, pivots offset ≈180 from the jambs. Swing **into the alfresco** and open into the pool-side lobby (DA-03). | Grade A safety glass to AS 1288 (e.g. 10.38 laminated); thickness by supplier for size & wind load | n/a | Top pivot + floor spring or pivot set rated for ≈85 kg leaves; long pull handles both sides; keyed lock/deadbolt; flush bolts on the passive leaf; weather seals; drained threshold, ≈100 step down | Floor boxes recessed in the slab (coordinate with post footings). Door stops/holders TBC. |
| **GW01** | 2 | Gable, either side of centre post (handed L/R pair) | Raked fixed glass | 3,361 × 1,004→429 | Fixed raked pane in frame on the beam, between gable posts; top follows the 9.7° ceiling line | Grade A safety glass to AS 1288 (e.g. 10.38 laminated); thickness by supplier for size & wind load | n/a | n/a | Template to the ceiling line on site |
| **GW02** | 2 | Gable, end panes at brick (handed L/R pair) | Raked fixed glass | 2,411 × 412→0 | Fixed raked pane in frame on the beam, between gable posts; top follows the 9.7° ceiling line | Grade A safety glass to AS 1288 (e.g. 10.38 laminated); thickness by supplier for size & wind load | n/a | n/a | End triangle: consider cladding the last 400–600 instead of glazing |
| **G01** | 1 | Pool-side lobby, front fence | Frameless glass pool gate | 900 × 1,200 | Opens **into the lobby, away from the pool** | 12 mm toughened pool fence glass (match existing) | n/a | Self-closing hinges + self-latching magnetic latch, release ≥ 1500 above ground | Test self-closing from any position. Gap under ≤ 100. |
| **F01** | 4 | Lobby fence: 2 sides 1,500 + 2 front panels 770 & 530 | Frameless glass pool fence panels | 1,200 high | Spigot mounted; sides return onto door-jamb posts P3 and P4 | 12 mm toughened (reuse existing panels where they fit) | n/a | Spigots, hinge panel, wall/post clamps | Gaps ≤ 100; keep 900 non-climbable zone clear inside the lobby. |

All units: frames aluminium, powdercoat charcoal to match existing frames (colour TBC). Window sizes are clear openings between steel post faces (posts at 2,411 centres, 2,100 at the doors); gallery and pane sizes are to mullion centrelines. The supplier is to site-measure and provide make-up sizes, frame deductions, glass thickness and wind rating (AS 2047) before ordering. Pool barrier items (W lower glass, louvre screens, G01, F01) are subject to certifier approval. Levels: heights are from the alfresco FFL (top of the new topped slab). The lobby and pool side stay about 100 lower, so D01 has a step down of about 100 into the lobby; lobby fence and gate heights are from the lobby level.

PROJECT
**Pool alfresco gable infill**
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

**PRELIMINARY**
**NOT FOR CONSTRUCTION**

REVISIONS

| | | |
|---|---|---|
| A | 05.11.2026 | Concept: Draft 2 for comment |
| B | 05.11.2026 | Window & door schedule added (DA-05) |
| C | 05.11.2026 | Corrections: spans, lobby, leaf weight |

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING
**Window & door schedule**

| SCALE | DATE | REV |
|---|---|---|
| NTS | 05.11.2026 | C |

**DA-05**