Pool alfresco gable infill: drawing pack

Concept Draft 2 · glazed wall on the existing pool fence line · 05.11.2026



In-situ overlay on a site photo, from inside the alfresco looking out (mirrored relative to the elevation). Indicative only, not a render. The existing glass fence is still visible; it is replaced by the new wall.

KEY INFORMATION

Overall opening	11,844 between brick returns
Plate height	3,110 FFL to top of steel beam (rake starts)
Steel beam	200 deep assumed: lower glazing head 2,910
Ceiling rake	9.7°: apex ≈ 4,122 AFL
Doors	Double pivot, 2,000 opening, 2 leaves ≈ 975 × 2,860, full height
Windows	4 off, 2,311 each: 1,200 solid glass, then glass louvres + fixed security screens to beam
Steel posts	6 off, 100 SHS (TBC): brick ends, between windows, door jambs
Gable posts	3 off: centre + over the posts between windows
Pool-side lobby	2,200 × 1,500, 1200 glass, 900 self-closing gate opening into lobby
Beam spans	2,461 / 2,411 / 2,100 / 2,411 / 2,461

SHEETS

DA-00	Cover, key information & in-situ view (NTS)
DA-01	Elevation from pool side (1:50 @ A3)
DA-02	Plan at gable wall (1:50 @ A3)
DA-03	Pool-side lobby: plan detail (1:20 @ A3)
DA-04	Opening schedule, steel setout & notes (NTS)

FOR

- **Structural engineer:** beam, posts, footings and gable post loads (DA-01, DA-02, DA-04).
- **Pool certifier:** barrier wall, lobby, gate and louvre screens (DA-02, DA-03, DA-04).
- **Window/door supplier:** quote from the schedule (DA-01, DA-04).

PROJECT
Pool alfresco gable infill
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

PRELIMINARY
NOT FOR CONSTRUCTION


REVISIONS
A 05.11.2026 Concept: Draft 2 for comment

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING
Cover, key information & in-situ view

SCALE	DATE	REV
NTS	05.11.2026	A

DA-00

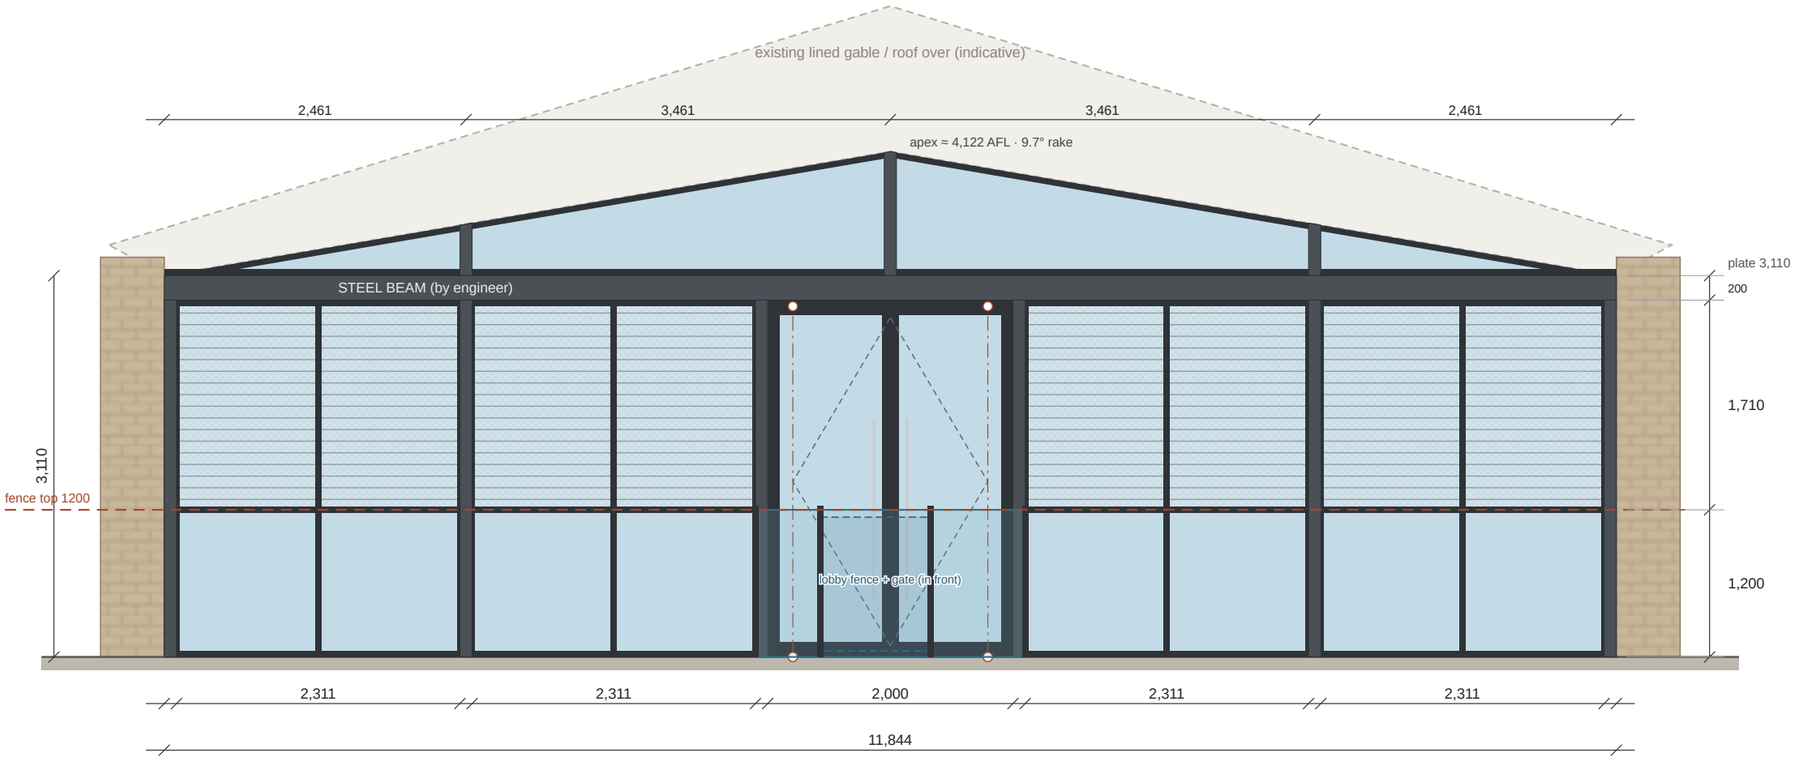

ELEVATION FROM POOL SIDE · scale 1:50 @ A3

Solid glass to the 1,200 fence line; glass louvres with fixed security screens above to the beam; full-height double pivot doors; steel posts at the brick ends, between the windows and at the door jambs. The lobby fence and gate are shown dashed in front of the doors. The roof outline over is indicative only.

0 1 2 3 4 5 m

PROJECT

Pool alfresco gable infill

Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

PRELIMINARY
NOT FOR CONSTRUCTION

REVISIONS

A 05.11.2026 Concept: Draft 2 for comment

GENERAL


All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING

Elevation from pool side

SCALE	DATE	REV
1:50 @ A3	05.11.2026	A

DA-01

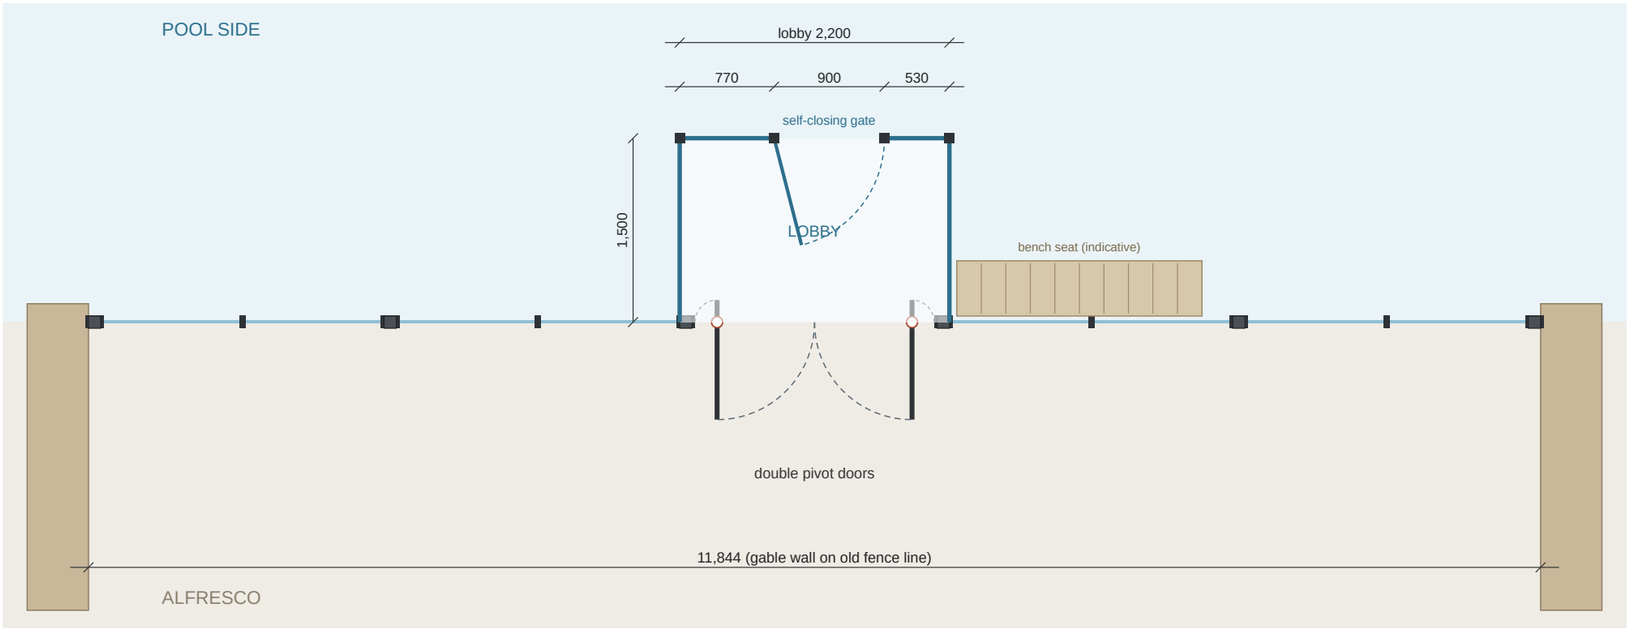

PLAN AT GABLE WALL · scale 1:50 @ A3

0 1 2 3 4 5 m

The wall is built on the existing pool fence line. The pivot doors swing into the alfresco. The pool-side lobby fence returns onto the door-jamb posts, and the gate opens into the lobby, away from the pool. Steel posts are shown solid. The bench seat is indicative.

PROJECT

Pool alfresco gable infill

Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

PRELIMINARY
NOT FOR CONSTRUCTION

REVISIONS

A 05.11.2026 Concept: Draft 2 for comment

GENERAL


All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING

Plan at gable wall

SCALE	DATE	REV
1:50 @ A3	05.11.2026	A

DA-02

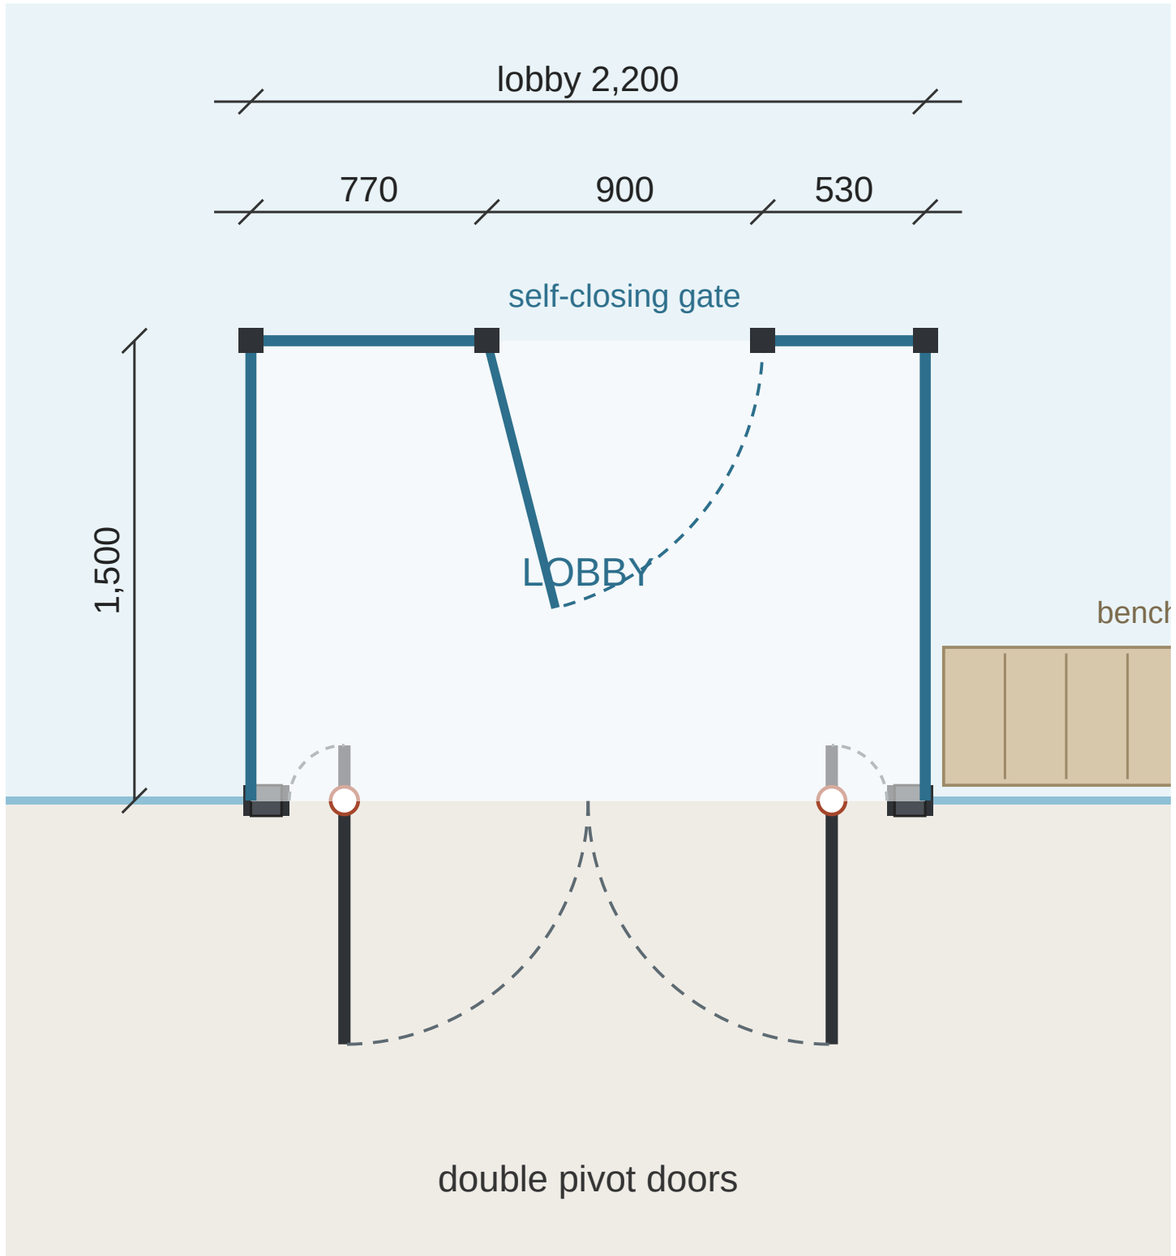

LOBBY & GATE REQUIREMENTS

- The lobby fence is a **1,200 minimum** glass pool barrier, matching the existing fence. The existing panels and spigots may be reused if they're compliant.
- The gate is **900 wide**, self-closing and self-latching from any position, with the **latch at 1,500 or higher** above ground (or shielded as per AS 1926.1).
- The gate **opens into the lobby, away from the pool**. Lobby depth (1,500) is set so the gate swings clear.
- The lobby fence returns onto the door-jamb steel posts. Gaps at the posts and under the panels must be 100 or less.
- Inside the lobby, keep the non-climbable zone clear: nothing climbable within 900 of the fence.
- The pivot doors open into the alfresco and sit inside the lobby, not in the pool area.

Lobby size 2,200 × 1,500 is an assumption from the hand sketch. Confirm it, and get the arrangement signed off by the pool certifier before ordering.

LOBBY PLAN DETAIL · scale 1:20 @ A3

0 1 2 m

PROJECT
Pool alfresco gable infill
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

PRELIMINARY
NOT FOR CONSTRUCTION

REVISIONS
A 05.11.2026 Concept: Draft 2 for comment

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING
Pool-side lobby: plan detail

SCALE	DATE	REV
1:20 @ A3	05.11.2026	A

DA-03

OPENING SCHEDULE

REF	TYPE	ZONE	WIDTH	HEIGHT	QTY	AREA M² (TOTAL)
A1	Pivot door leaf	Centre pivot doors	975	2,860	2	5.58
A2	Glass louvre + security screen	Main	1,156	1,710	8	15.81
A3	Fixed glass	Base (fence line)	1,156	1,200	8	11.09
A4	Raked fixed glass	Gable	3,361	429→1,004	2	4.82
A5	Raked fixed glass	Gable	2,411	0→412	2	0.99
A6	Pool fence glass	Lobby front	770	1,200	1	0.92
A7	Pool fence glass	Lobby front	530	1,200	1	0.64
A8	Pool fence glass	Lobby sides	1,500	1,200	2	3.60
A9	Glass pool gate	Lobby front (self-closing)	900	1,200	1	1.08
	Total glazed area (approx.)					**44.5**

Module sizes to mullion centrelines. Make-up sizes by supplier after site measure.

STEEL SETOUT (FROM LEFT BRICK, VIEWED FROM POOL)

REF	MEMBER	CENTRE	SIZE	HEIGHT	GABLE POST OVER
P1	End post against brick	50	100 SHS (TBC)	0 → 2,910	
P2	Post between windows	2,461	100 SHS (TBC)	0 → 2,910	Yes
P3	Door jamb post	4,872	100 SHS (TBC)	0 → 2,910	
P4	Door jamb post	6,972	100 SHS (TBC)	0 → 2,910	
P5	Post between windows	9,383	100 SHS (TBC)	0 → 2,910	Yes
P6	End post against brick	11,794	100 SHS (TBC)	0 → 2,910	
B1	Beam, full width	0 → 11,844	200 deep (TBC)	2,910 → 3,110	

REF	GABLE MEMBER	CENTRE	FROM CENTRE	BEARS ON
G1	Gable post	2,461	-3,461	Over post P2
G2	Centre (king) post	5,922	0	Over door bay (beam)
G3	Gable post	9,383	3,461	Over post P5

STRUCTURE (ENGINEER TO CONFIRM)

- The beam sits within the 3,110 plate height. The lower glazing head is 2,910 with a 200 beam.
- Posts at the brick ends, between the windows and at the door jambs give beam spans of 2,461 / 2,411 / 2,100 / 2,411 / 2,461.
- The gable posts sit directly over posts P2 and P5 and over the beam at the centre of the door bay. Advise whether they carry roof load or are only glazing mullions.
- Post base plates and footings to suit the slab at the old fence line (footing locations TBC).
- Pivot door floor boxes need recesses in the slab. Coordinate them with the post footings.
- Paint the steel to match the charcoal window frames.

GLAZING & LOUVRES

- The lower 1,200 is fixed glass in every window, and the louvres run from 1,200 to the beam (no transom).
- Glass louvre blades max about 1,200 long, so each window has one mullion and two louvre galleries.
- Fixed security screens (stainless mesh) to all louvres, on the pool side so the operators can be reached from inside. They must be removable only with tools.
- Gable: raked fixed glass between the gable posts. Consider cladding the last 400–600 at each end.
- Pivot leaves ≈ 975 × 2,860, about 70–80 kg each in 10.38 laminated glass. Supplier to confirm the hardware.

POOL BARRIER

- The new wall replaces the glass fence and becomes part of the pool barrier (NSW Swimming Pools Act and Regulation; AS 1926.1).
- The doors open into the pool-side lobby, not the pool area. The lobby fence and gate complete the barrier (DA-03).
- The louvres open fully behind fixed security screens. Give the certifier the screen spec.
- The 1,200 solid glass base is non-climbable and matches the fence line.

TO CONFIRM

- Site measures: width at the floor and at the plate, whether the brick returns are plumb, the slab fall and levels at the fence line.
- That the 3,110 is to the top of the plate/beam (assumed).
- Beam, post and footing sizes (engineer).
- Lobby size and gate position; the certifier's acceptance.
- Louvre system and screen product; pivot hardware; frame colour.

PROJECT
Pool alfresco gable infill
Glazed wall on pool fence line, pivot doors & pool-side lobby

SITE

CLIENT

PREPARED BY

PRELIMINARY
NOT FOR CONSTRUCTION

REVISIONS
A 05.11.2026 Concept: Draft 2 for comment

GENERAL
All dimensions in mm. Do not scale from this drawing; site-measure before ordering. Steel sizes by structural engineer. Pool barrier to be confirmed by certifier. Window and door make-up sizes by supplier.

DRAWING
Opening schedule, steel setout & notes

SCALE NTS | DATE 05.11.2026 | REV A

DA-04